


External Dimensions (mm)

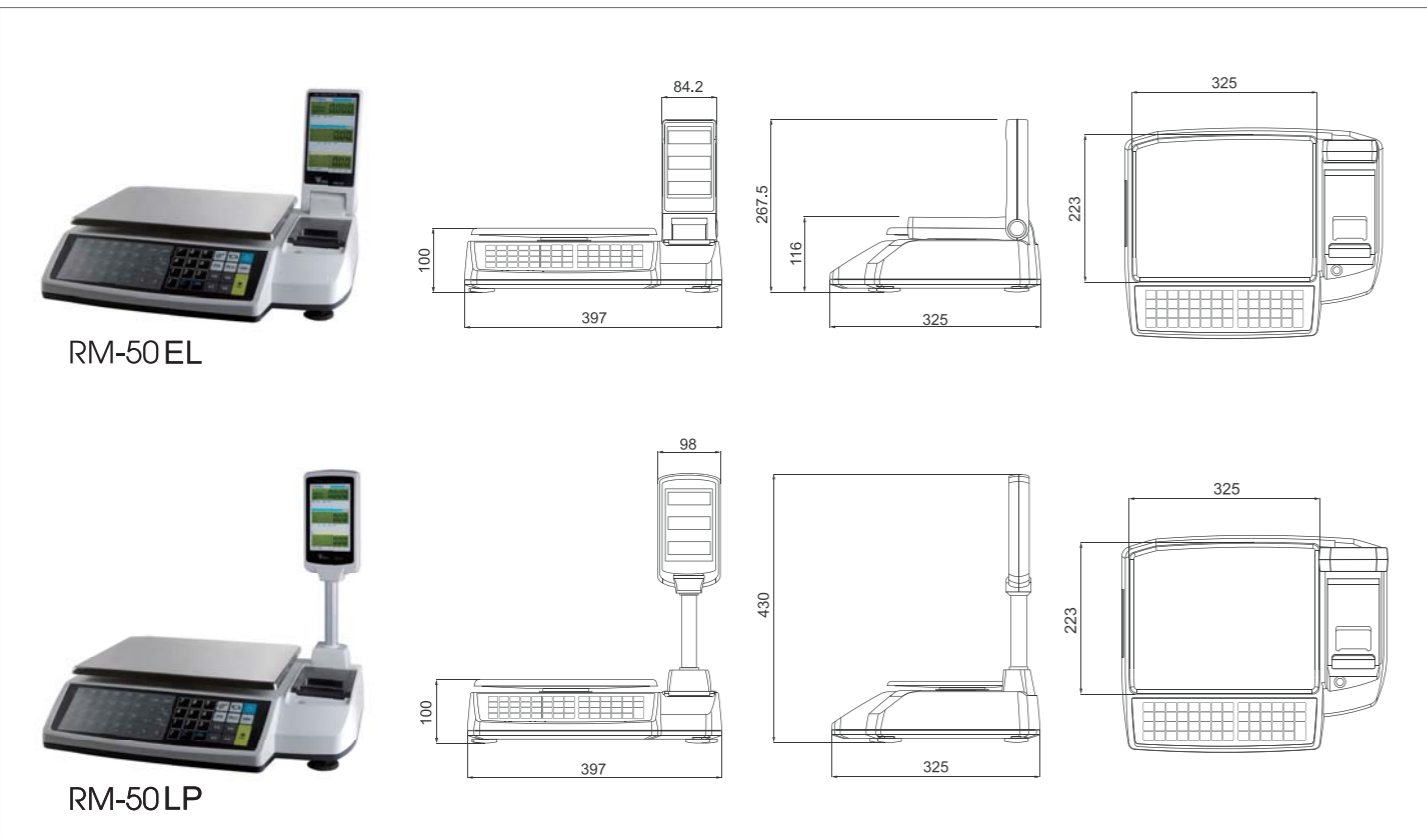

RM-50 Series

Scale Receipt Printer

Weighing and receipt printing anywhere



Basic Specifications

Capacity	Single Interval Type 1 / 3,000	Max 3kg e=1g	Max 6kg e=2g	Max 12kg e=2g	Max 15kg / 30lb e=5g / 0.01lb	Max 30kg e=10g
	Multi Interval Type 1 / 3,000	Max 3 / 6 kg e = 1 / 2 g		Max 6 / 15 kg e = 2 / 5 g	Max 15 / 30 kg e = 5 / 10 g	
Model	RM-50	RM-50EL	RM-50LP			
Display	10 segments LCD for 22 digits display		10 segments LCD for 22 digits display (backlight)			
Number of Preset Keys	24					
Display Resolution	1 / 3,000					
Paper Width	48 mm					
Printing Speed	MAX 75 mm / sec.					
Power Source	AC 100 / 117 / 220 / 230 / 240 Volts (+10%, -15%) Rechargeable battery (Option, DC 12 Volts, 5Ah)				*See Foot Not	
Operating Temperature	-10 °C to +40 °C					
Standard Interface	AC receptacle, Cash drawer control port (Drive voltage is 8 Volts.), RS-232C interface, RS-485 interface					
Platter size	286 mm × 223 mm					
Overall size	397 mm × 325 mm × 267.5 mm			397 mm × 325 mm × 430 mm		
Net Weight	5.2kg			5.4kg		

*Under normal temperature, 20°C, RM-50 can be operated with built-in Battery charged for 8 hours, for more than 72 hours without using receipt, or 2 days using 200 receipts in 10 hours per day.

*Meet or exceed OIML Class III or NTEP HB44 requirements.
*Specifications are subject to change without prior notice.

SHANGHAI TERAOKA ELECTRONIC CO., LTD.

1st Floor of #2 Building, Jia Yuan Business Center,
#51 Long Wu Road, Shanghai 200232, P.R. OF CHINA
TEL: +86-21-64085151
FAX: +86-21-54900008
URL: <http://www.digi-scale.com>
E-MAIL: steservice@digi-scale.com

Variation: Long Pole & Backlight types

